


UP CARLIGHT

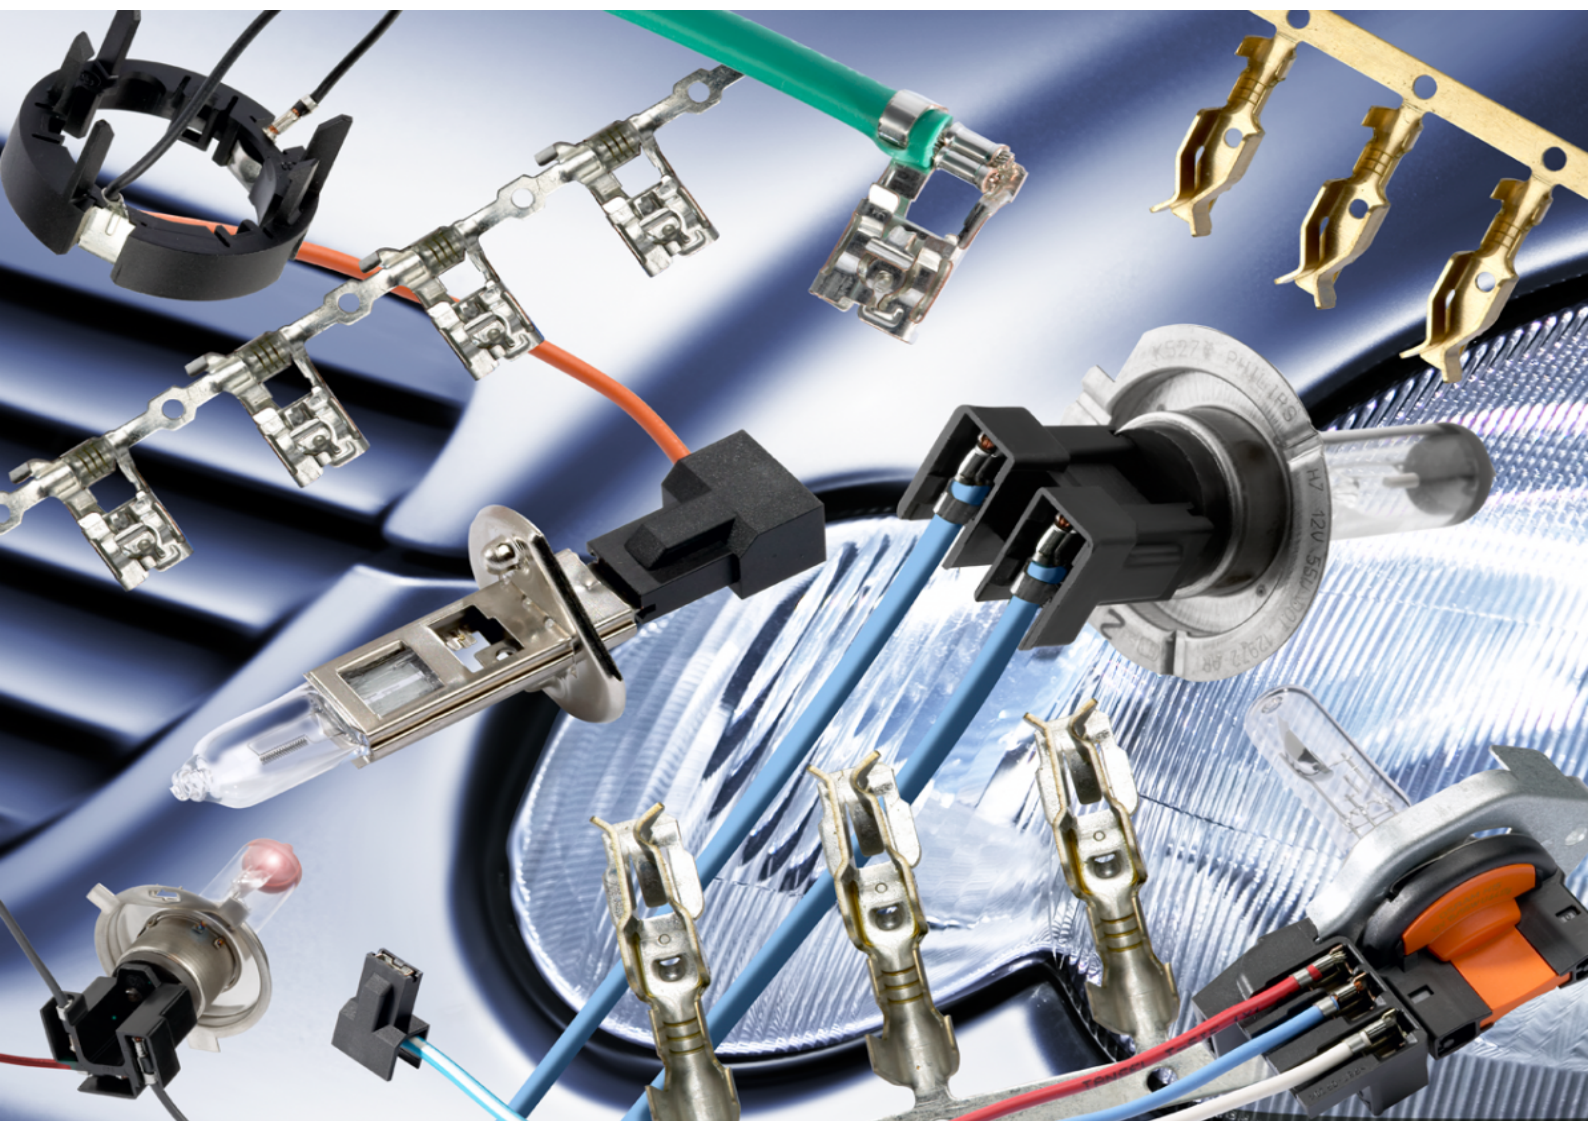

ESCUBEDO
CONNECTION SYSTEMS

Receptacles for connector

H15 Lamp receptacle

Figure	Part number	Wire size mm ² (AWG)	∅ Insulation (mm)	Cu. Alloy Pre-Sn 51	Material thickness (mm)	Winding number
	8430.**	0,5-1 (20-18)	2,5 Max	•	0,32	3000



Receptacle Connectors

Figure	Part number	Ways	PBT-GF20 Black 95
	24832**	3	•
3 ways connector			
	24836**	3	•
H15 cover connector			

Flags for connector

Low insertion

Figure	Part number	Wire size mm ² (AWG)	Ø Insulation (mm)	For male (mm)	Material		Material thickness (mm)	Winding number
					Brass 00	Brass Pre-Sn 01		
	5367.**	0,5-1 (20-18)	1,6-2,3	7,9x0,75	<input type="checkbox"/>	<input type="checkbox"/>	0,4	3500
	5365.**	1-2,5 (18-14)	3-4,3		<input type="checkbox"/>	<input type="checkbox"/>		3000



Flag Receptacle Holder Connectors

Figure	Part number	Material	
		PA66V2 Natural 10	PA66V2 Black 15
	28054.**	<input type="checkbox"/>	<input type="checkbox"/>
	Secondary Lock 28056.**	<input type="checkbox"/>	<input type="checkbox"/>

Lampholder

PS21W Lamp contact

Figure	Part number	Wire size mm ² (AWG)	∅ Insulation (mm)	Inox Pre-Sn 61	Material thickness (mm)	Winding number
	Lamp contact					
	8805F**	0,5 (20)	1,5	•	0,3	4500
8805.**	0,75-1 (18)	1,5-1,9	•			



Flag lamp holder 5W

Figure	Part number	Wire size mm ² (AWG)	∅ Insulation (mm)	Brass 00	Brass Pre-Sn 01	Bronze 30	Bronze Pre-Sn 31	Material thickness (mm)	Winding number
	Special Flag								
	8808.**	0,5-0,8 (20-18)	2,1 Max	•	•	•	•	0,4	4500
	8808T**			•	•	•	•		
	8809.**	0,5-1,5 (20-16)	2,5 Max	•	•	•	•		
8809T**	•			•	•	•			



Lampholder

Lamp holder 5W

Figure	Part number	Wire size mm ² (AWG)	Ø Insulation (mm)	Din	Brass	Brass Pre-Sn	Bronze	Bronze Pre-Sn	Material thickness (mm)	Winding number
					00	01	30	31		
	8825.**	0,35-0,5 (22-20)	1,3-1,6				•		0,35	5500
SEAL										
	8854.**	0,35-0,75 (22-18)	SEAL	Esp	•	•	•	•	0,4	3500
	8856.**	0,75-1,5 (18-16)			•	•	•	•		
Standard Terminal										
	8816.**	0,2-0,6 (24-20)	1,4-2,1		•	•	•	•	0,4	5000
	8800.**	0,5-1,5 (20-16)	2-3,3		•	•	•	•		4500
	8800K.**	0,75-1,5 (18-16)	2-3,3		•	•	•	•		5000
	8801.**	1-2 (18-14)	2,5-3,5		•	•	•	•		4500
Secondary Lock										
	8845.**	0,2-0,6 (24-20)	1,4-2,1		•	•			0,4	5000
	8847.**	0,75-1,5 (18-16)	2-3,3		•	•				
Simetric Short Lampholder										
	8821.**	0,2-0,6 (24-20)	1,4-2,1		•	•			0,4	6500
	8823.**	0,5-1 (20-18)	1,8-2,5		•	•				5000



Lampholder

Lamp holder 5W

Figure	Part number	Wire size mm ² (AWG)	Ø Insulation (mm)	Din	Brass	Brass Pre-Sn	Bronze	Bronze Pre-Sn	Material thickness (mm)	Winding number	
					00	01	30	31			
	Asimetric Short Lampholder										
	8841.**	0,2-0,6 (24-20)	1,4-2,1		•	•			0,4	6500	
8843.**	0,5-1 (20-18)	1,8-2,5		•	•			5000			



Lamp-holder W21-5W

Figure	Part number	Wire size mm ² (AWG)	Ø Insulation (mm)	Bronze Pre-Sn	Material thickness (mm)	Winding number
				31		
	8860.**	0,35-0,5 (22-20)	1,8 Max	•	0,3	7000
	8862.**	0,75-1,5 (18-16)	2,5 Max	•		

