


**Up** TP LOCK

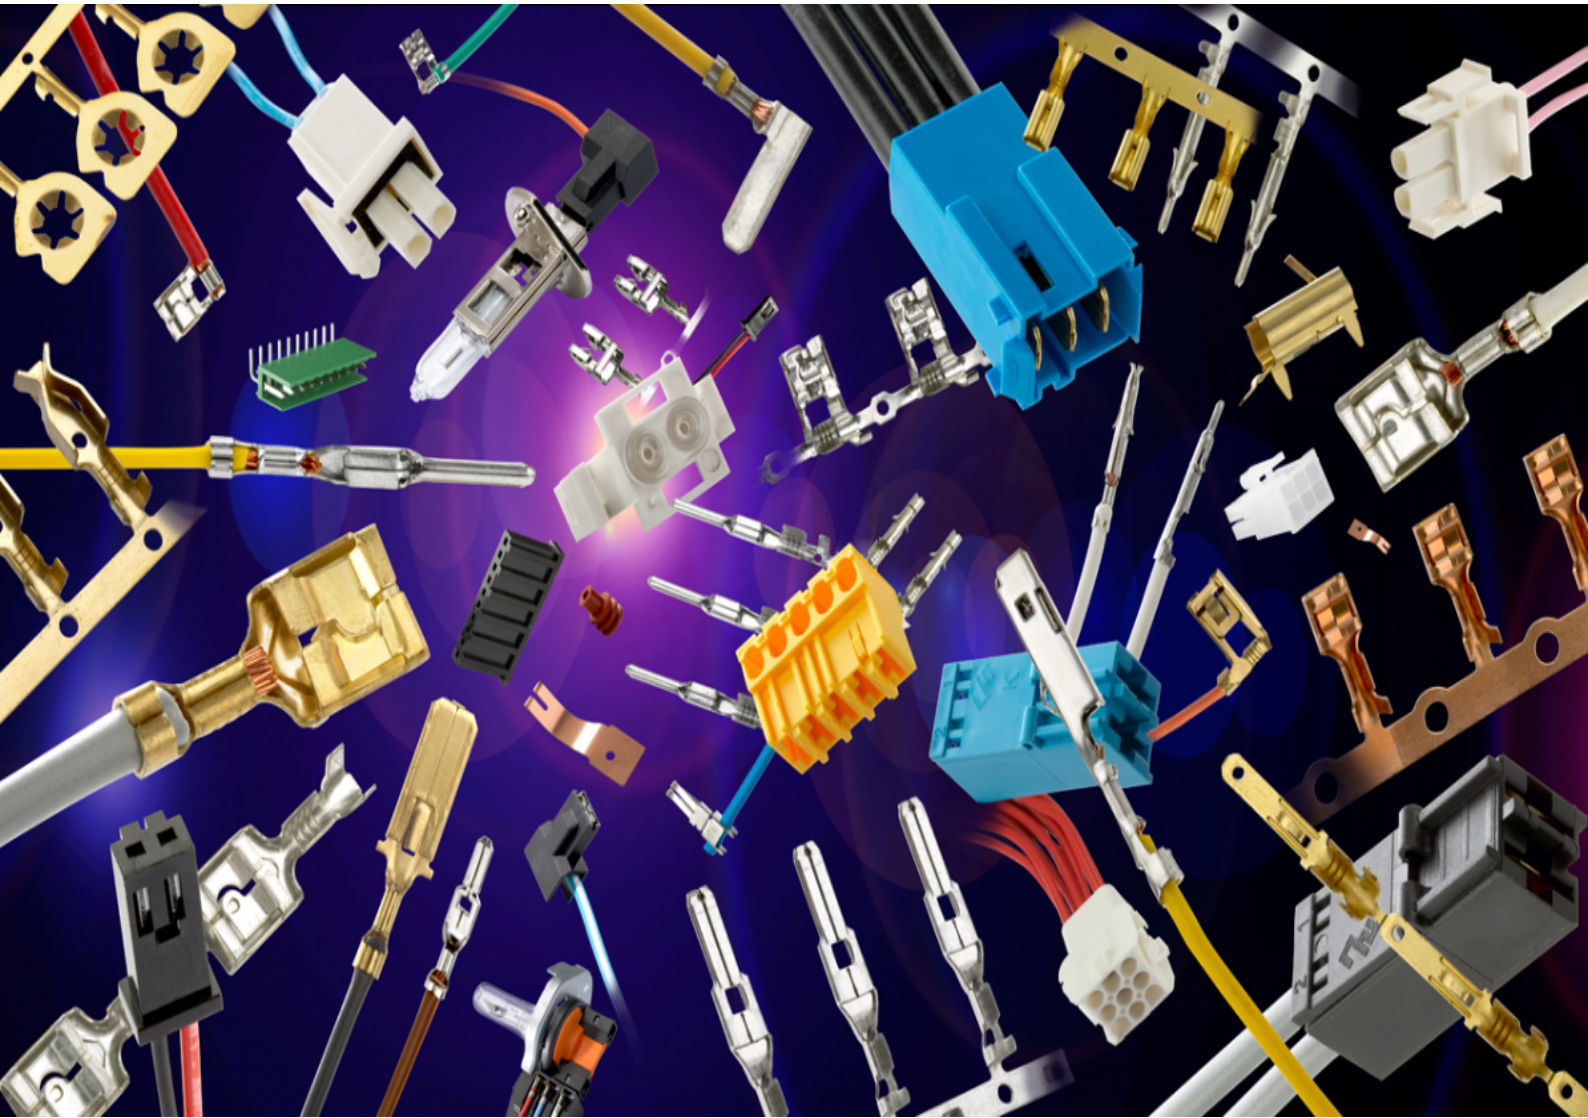

**ESCUBEDO**  
CONNECTION SYSTEMS

## Hembras

Seguridad básica sobre diseño TP



Figura	Referencia	Sec. cable mm <sup>2</sup> (AWG)	Ø Aislante (mm)	Para macho (mm)	00 Latón	01 Latón Pre-Sn	02 Latón Sn	24 Acero Ni	30 Bronce	31 Bronce Pre-Sn	70 Alpaca	Esesor material (mm)	Cantidad bobina
	<b>4913F**</b>	<b>0,3-0,75</b> (22-18)	1,4-2,4	4,8x0,5	•	•		•	•	•		0,35	10000
	<b>4915F**</b>			4,8x0,8	•	•		•	•	•			
	<b>4913.**</b>	<b>0,5-1</b> (20-18)	1,8-2,5	4,8x0,5	•	•		•	•	•			
	<b>4915.**</b>			4,8x0,8	•	•	•	•	•	•			
	<b>4913E**</b>	<b>0,5-1,5</b> (20-16)	1,8-2,5	4,8x0,5	•	•		•	•	•			
	<b>4915E**</b>			4,8x0,8	•	•		•	•	•	•		
	<b>4917.**</b>	<b>1-2,5</b> (18-14)	3-4,3	4,8x0,5	•	•		•	•	•			
	<b>4919.**</b>			4,8x0,8	•	•		•	•	•	•		

## Banderas

Seguridad básica sobre diseño TP



Figura	Referencia	Sec. cable mm <sup>2</sup> (AWG)	Ø Aislante (mm)	Para macho (mm)	Latón	Latón Pre-Sn	Latón Sn	Acero Ni	Bronce	Bronce Pre-Sn	Bronce Sn	Espesor material (mm)	Cantidad bobina
					00	01	02	24	30	31	32		
	<b>5713.**</b>	<b>0,3-0,75</b> (22-18)	2,1 Max	4,8x0,5	•	•		•				0,35	5000
	<b>5715.**</b>			4,8x0,8	•	•		•					
	<b>5712.**</b>	<b>0,5-1,5</b> (20-16)	1,9-3,3	4,8x0,5	•	•		•	•	•			
	<b>5714.**</b>			4,8x0,8	•	•		•	•	•			
	<b>5712E**</b>			2,5 Max	4,8x0,5	•	•	•	•	•	•		

## Hembras

Seguridad básica sobre diseño TP



Figura	Referencia	Sec. cable mm <sup>2</sup> (AWG)	Ø Aislante (mm)	Para macho (mm)	Latón	Latón Pre-Sn	Latón Sn	Acero Ni	Bronce	Bronce Pre-Sn	Bronce Sn	Alpaca	Espesor material (mm)	Cantidad bobina		
					00	01	02	24	30	31	32	70				
	<b>4933.**</b>	<b>0,2-0,6</b> (24-20)	1,4-2,1	6,3x0,8	•	•		•	•	•		•	0,4	8000		
	<b>4930.**</b>	<b>0,5-1</b> (20-18)	1,8-2,5		•	•		•	•	•	•				•	7000
	<b>4931.**</b>	<b>0,5-1,5</b> (20-16)	2-3,3		•	•	•	•	•	•	•	•			•	
	<b>4932.**</b>	<b>1-2,5</b> (18-14)	3-4,3		•	•	•	•	•	•	•	•		•		
	<b>4934.**</b>	<b>2,5-5</b> (14-10)	3,6-5			•	•	•	•	•	•	•		•		

## Banderas

Seguridad básica sobre diseño TP



Figura	Referencia	Sec. cable mm <sup>2</sup> (AWG)	Ø Aislante (mm)	Para macho (mm)	Latón	Latón Pre-Sn	Acero Ni	Bronce	Bronce Pre-Sn	Alpaca	Espesor material (mm)	Cantidad bobina
					00	01	24	30	31	70		
	<b>5720F**</b>	<b>0,2-0,6</b> (24-20)	2,1 Max	6,3x0,8	•	•		•	•		0,4	4000
	<b>5720.**</b>	<b>0,5-1,5</b> (20-16)	1,9-3,3		•	•	•	•	•	•		3500
	<b>5722.**</b>	<b>1-2,5</b> (18-14)	2,7-3,8		•	•	•	•	•	•		3000
	<b>5723.**</b>	<b>1,5-3</b> (16-12)			•	•	•	•	•	•		